

UC GOLD CHUCK (UC10)

UC 黃金夾頭刀柄 (UC10)


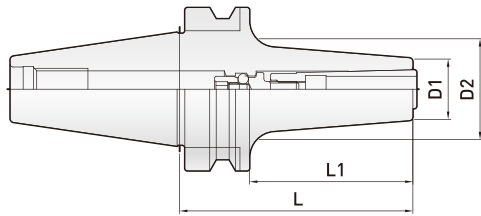


Fig 1 / 圖號 1


Fig 2 / 圖號 2



Taper tolerance
錐度公差




Surface roughness
表面粗度



Run out accuracy
內孔偏擺度



Surface hardness
表面硬度



Carbonized depth
滲碳深度

Slim Long Type 小徑加長型

Order Code 訂購編號	L	L1	D1	D2	Fig 圖號	Min ⁻¹ G2.5 動態平衡	Spanner 扳手規格	Recommended Torsion 推薦鎖固扭力	Fixed Torque Spanner 固定扭力扳手
BT30-UC10-70	70	48	24	32	1	30,000	M5	7Nm	30294-5152
BT40-UC10-90	90	63	24	35	1	30,000	M5	7Nm	30294-5154
UC10-120	120	93	24	40	1	30,000	M5	7Nm	30294-5156
UC10-150	150	123	24	46	1	30,000	M5	7Nm	30294-5156
BT50-UC10-110	110	72	24	36	1	20,000	M5	7Nm	30294-5156
UC10-150	150	112	24	43	1	20,000	M5	7Nm	30294-5158
UC10-200	200	162	24	52	1	20,000	M5	7Nm	30294-5159

High Vibration Damping Type 高阻尼減震型

BT40-UC10-70	70	38	30	37.5	2	30,000	M5	7Nm	30294-5152
--------------	----	----	----	------	---	--------	----	-----	------------

- Collet chuck designed without nut and with inner-holding collet. This has strong rigidity and high stability.
- Torque wrench is recommended for chuck stability.
- Torque wrench must be ordered separately.
- The recommended torsion and correct torque wrench prevents deformation of the tool holder.


- 沒有螺帽的後拉式夾頭設計，鋼性強穩定性高。
- 為求使用上的穩定性，建議使用扭力扳手。
- 扭力扳手必須另外訂購。
- 鎖固扭力不要超過推薦值的30%以上，過高的鎖固扭力，可能導致刀柄的變形。




UC COLLET

UC 黃金夾頭

- Runout <math>< 5\mu\text{m}</math> (4×D)
- 跳動精度 <math>< 5\mu\text{m}</math> (4×D)

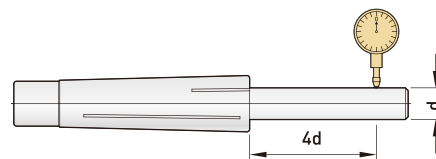


UC 6



Order Code 訂購編號	(d) 夾持徑
UC6-3	3
4	4
5	5
6	6




UC 10



Order Code 訂購編號	(d) 夾持徑
UC10-3	3
4	4
5	5
6	6
8	8
10	10




UC 16 Center Coolant (中心出水)



Order Code 訂購編號	(d) 夾持徑
UC16-6	6
8	8
10	10
12	12
14	14
16	16



UC 20 Center Coolant (中心出水)



Order Code 訂購編號	(d) 夾持徑
UC20-6	6
8	8
10	10
12	12
16	16
20	20

FIXED TORQUE SPANNER

固定扭力扳手



Order Code 訂購編號	Torque 扭力值	⊙	L	Tool Item 適用規格
30294-5144	5Nm	4	70	UC6
5146	5Nm	4	115	UC10
5152	7Nm	5	55	
5154	7Nm	5	90	
5156	7Nm	5	140	
5158	7Nm	5	180	
5159	7Nm	5	240	

TORQUE WRENCH

扭力扳手



Order Code 訂購編號	Torque Nm 扭力值	Square Drive 接頭	Length (mm) 長度
TW30	5~30	3 / 8"	300



Order Code 訂購編號	⊙	Length (mm)	Tool Item 適用規格
M06100	6	100	UC16
M06160	6	160	UC16
M06200	6	200	UC16
M08100	8	100	UC20
M08160	8	160	UC20
M10100	10	100	UC25
M10160	10	160	UC25